


## TRASFORMATORI SERIE A 38 32x38




A38057R	230-380	6	5-3-1	18	7-9	F*
A38058R	440	6	1-5	19	7-9	F*
A38059R	230-400	5	5-3-1	24	7-9	F*
A38060R	230-170	4	4-6 1-3	9	10-12	F
A38061R	380	5	1-6	12-12	7-8 11-12	F
A38062R	400	5	1-6	9	8-11	F

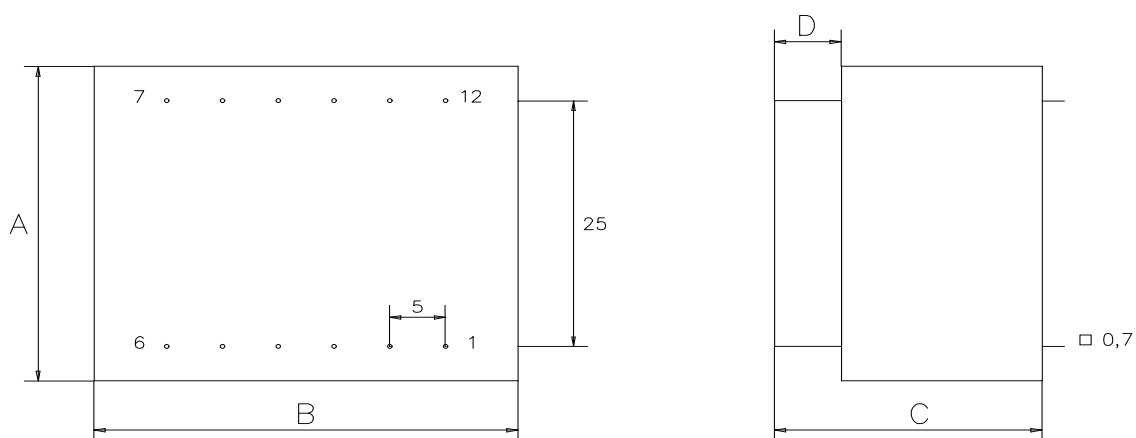

VERSIONE AA	A=35	B=41	C=22	D=4 mm
VERSIONE A	A=36.7	B=38	C=26	D=6 mm
VERSIONE B	A=35	B=41	C=28	D=4 mm
VERSIONE C	A=36.7	B=38	C=28	D=6 mm
VERSIONE D	A=35	B=41	C=30	D=4 mm
VERSIONE E	A=36.7	B=38	C=32	D=6 mm
VERSIONE F	A=35	B=41	C=34	D=4 mm

MODELLO CON \*

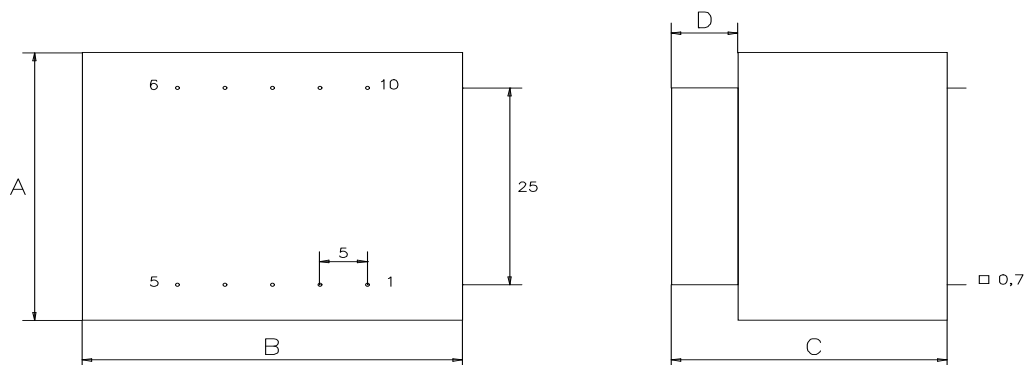

vista lato pin