


TRASFORMATORI SERIE A 40

34x40



| COD | PRIMARIO V | POTENZA VA | PIN | SECONDARIO V | PIN | DISEGNO |
|-----------|---------------|---------------|-------|-----------------|----------|---------|
| A40020G/R | 230 | 3.6 | 1-5 | 12 | 7-9 | E/F |
| A40021G/R | 230 | 6 | 1-5 | 12 | 7-9 | E/F |
| A40022G/R | 230 | 7 | 1-5 | 24 | 7-9 | E/F |
| A40023G/R | 115 | 7 | 1-5 | 24 | 7-9 | E/F |
| A40024G/R | 115-230 | 4 | 3-1-5 | 12 | 7-9 | E/F |
| A40025G/R | 230 | 5 | 1-5 | 13 | 7-9 | E/F |
| A40026G/R | 230 | 5 | 1-5 | 24 | 7-9 | E/F |
| A40027G/R | 230 | 5 | 1-5 | 12-12 | 6-7 9-10 | E/F |
| A40028G/R | 115-230 | 5 | 5-3-1 | 24 | 7-9 | E/F |
| A40029G/R | 230 | 7 | 1-5 | 13 | 7-9 | E/F |
| A40030G/R | 230 | 4 | 1-5 | 18 | 7-9 | E/F |
| A40031G/R | 230 | 6 | 1-5 | 3 | 7-9 | E/F |
| A40032G/R | 230 | 7 | 1-5 | 8-8 | 6-7 9-10 | E/F |
| A40033G/R | 250 | 7 | 1-5 | 17-17 | 6-7 9-10 | E/F |
| A40034G/R | 230 | 7 | 1-5 | 6-6 | 6-7 9-10 | E/F |
| A40035G/R | 115-230 | 4 | 5-3-1 | 12 | 7-9 | E/F |
| A40036G/R | 230 | 5 | 1-5 | 15 | 7-9 | E/F |

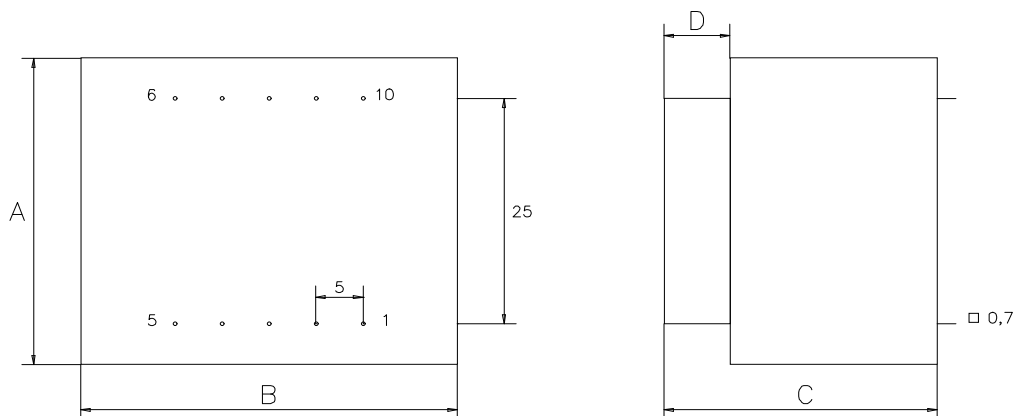

| | | | | |
|------------|------|------|------|--------|
| VERSIONE A | A=34 | B=40 | C=29 | D=7 mm |
| VERSIONE B | A=39 | B=45 | C=36 | D=5 mm |
| VERSIONE C | A=34 | B=40 | C=31 | D=7 mm |
| VERSIONE D | A=39 | B=45 | C=38 | D=5 mm |
| VERSIONE E | A=34 | B=40 | C=36 | D=7 mm |
| VERSIONE F | A=39 | B=45 | C=43 | D=5 mm |

vista lato pin

PAG. 20